


## EUROPROFILE ANTI-PANIC CYLINDER

D5S.700.SB, D5S.710.SB, D5S.700A.SB, D5S.710A.SB, D5S.700L.SB, D5S.710L.SB

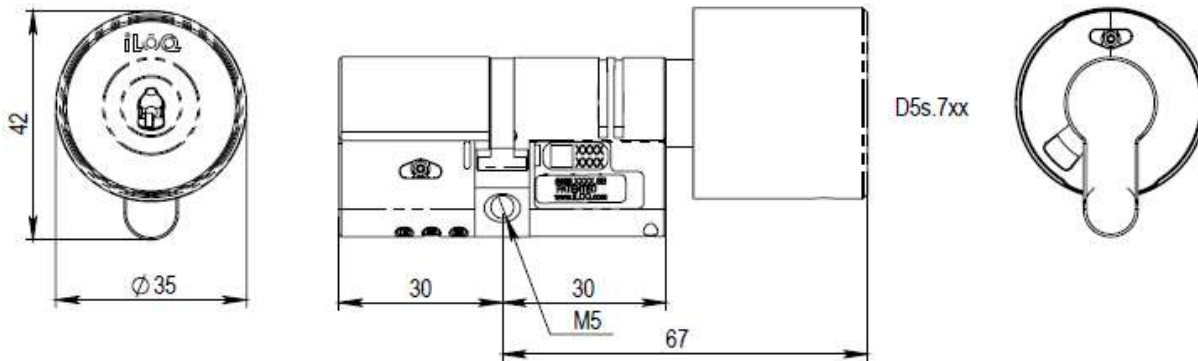

### Overview

The self-powered iLOQ S5 system is a next-generation locking system that replaces difficult-to-manage mechanical locks and electromechanical locks that depend on an external power source such as batteries. The highly encrypted system enables flexible and secure access management and maintains high security in demanding properties such as commercial real estate, office buildings and housing associations.

The iLOQ D5S lock cylinders get their energy from the motion of inserting the key into the lock cylinder. This eliminates the need for any type of batteries or cabling. Because no batteries are needed, maintenance and lifecycle costs are significantly lower than mechanical or battery-operated electromechanical locking systems.

The lock cylinders operate as part of the iLOQ D2D network, which makes it quick and easy to remove lost keys from the system, change access rights and track log events.

The iLOQ S5 product family covers cylinders, padlocks and furniture locks etc. The iLOQ S5 system can also be expanded into a remote access control system with iLOQ Online products.

### iLOQ D5S.7xx Europrofile anti-panic cylinders in brief

- battery-free digital lock cylinder for iLOQ S5 locking system
- lock does not need batteries or cables
- powerful and secure AES-256 encryption for common lock and key authentication
- as part of the D2D network, it acts as an information receiver and data sharer
- initial programming via PC using the iLOQ P55S.1 programming token connected to the server
- Length in 5 mm steps up to 100 mm (knob side) available
- lock can be set with access areas for lock groups or individual locks
- programmable lock opens with a compatible K5S key
- blocking list for single lost keys
- log memory for openings and opening attempts (timestamps with RTC)
- supports time constraints in the form of time profiles (with RTC)
- reprogramming with the K5S keys or the P55S.1 programming token
- updatable firmware


## Product versions

D5S.700.SB.xx .....	Anti-panic cylinder
D5S.710.SB.xx .....	Anti-panic cylinder with RTC
D5S.700A.SB.xx.....	High Security anti-panic cylinder
D5S.710A.SB.xx.....	High Security anti-panic cylinder with RTC

xx = necessary outside length, in 5 mm steps beginning with 30 mm, e.g. D5S.700.SB.35

The inside length is always 30 mm

## Product versions long-neck

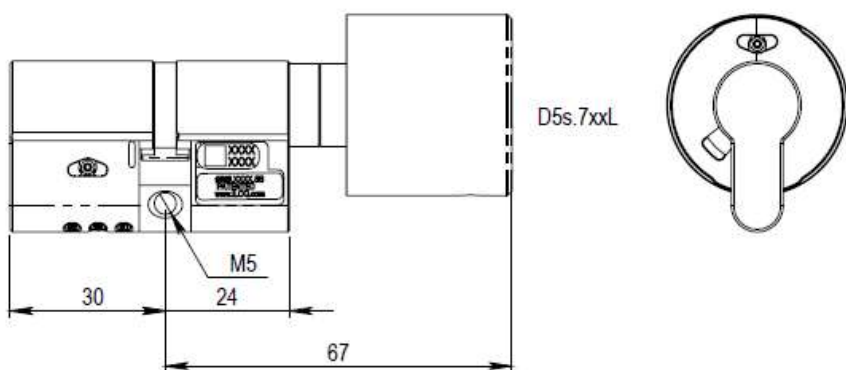

D5S.700L.SB.xx.....	Long-neck anti-panic cylinder
D5S.710L.SB.xx.....	Long-neck anti-panic cylinder with RTC

xx = necessary outside length, in 5 mm steps beginning with 30 mm, e.g. D5S.700L.SB.35

The inside length is always 30 mm

---

## Memory capacity

Amount of access areas .....	210
Number of keys on the blocked list .....	500/zone
Amount of time profiles .....	10
Event log .....	at least the 500 most recent events

---

## Technical data

Lock body.....	stainless steel
Durability EN15684:2013-01 (Grades 4-6).....	Grade 4, 25 000 cycles (equivalent to 50 000 openings)
Electronic key-related security EN15684:2013-01 (Grades A-F).....	Grade F (1000 000 000 combinations, secured communication)
Category of use: EN15684 (Grades 0-1).....	Grade 1
Fire- and smoke resistant (Grade 0-B).....	Grade B (T120)
Environmental resistance: EN15684 (Grades 0-4) .....	Grade 4
System management: EN15684 (Grades 0-3) .....	Grade 3
Attack resistance: EN15684 (Grades 0-2) .....	Grade 2 (*
Temperature range.....	-25 °C – +70 °C
Ingress protection rating .....	IP55
Certificates.....	EN15684, SKG***, VDS CZ+ (**, DIN18252 F1A, R1

(\*for A version / (\*\* in progress