

D50S.711.SD.CH.95 Anti-panic cylinder

System-level description

The patented, award winning iLOQ S50 locking system offers advanced security and convenient access sharing features for master-key locking environments.

The iLOQ D50S cylinders harvest electricity wirelessly from the NFC field. This technology transforms a smartphone into a key and power source making the lock completely battery-free. Because no batteries are required, the locks are a maintenance-free and environmentally-friendly green solution that reduces workload, costs, waste and harm associated with battery-powered solutions.


The iLOQ S50 doesn't have a keyway due to contactless NFC technology. The lock is designed for exposure to harsh environments and extreme climates, while remaining water-resistant and dustproof.

The smartphone as a key provides exceptional features coupled with high security. With flexible access sharing, time restrictions and audit trail reporting over-the-air, security gaps caused by lost keys can be eliminated completely without costly changes to locks and keys.

Feature summary

- Battery-free programmable electromechanical lock cylinder for iLOQ S50 locking system
- NFC-powered: no batteries required for the lock
- Opening with NFC enabled Android or iOS phone or iLOQ K55S Key Fob
- Secured using powerful AES-256 encryption and mutual authentication
- Compatible with EN 15684 cylinder standard
- Lengths available in 5 mm steps up to 100 mm (knob side)
- Initial programming with PC and iLOQ P55S.1 Programming Token in connection to server
- Access right list for access groups
- Blocklist for individual lost keys
- Internal audit trail record with time stamp (can be configured on/off)
- Supports time restrictions
- Can be configured to require online opening authentication
- Re-programming with keys (Android/iOS phone or K55S Key Fob)
- Firmware updateable

Dimensional drawing

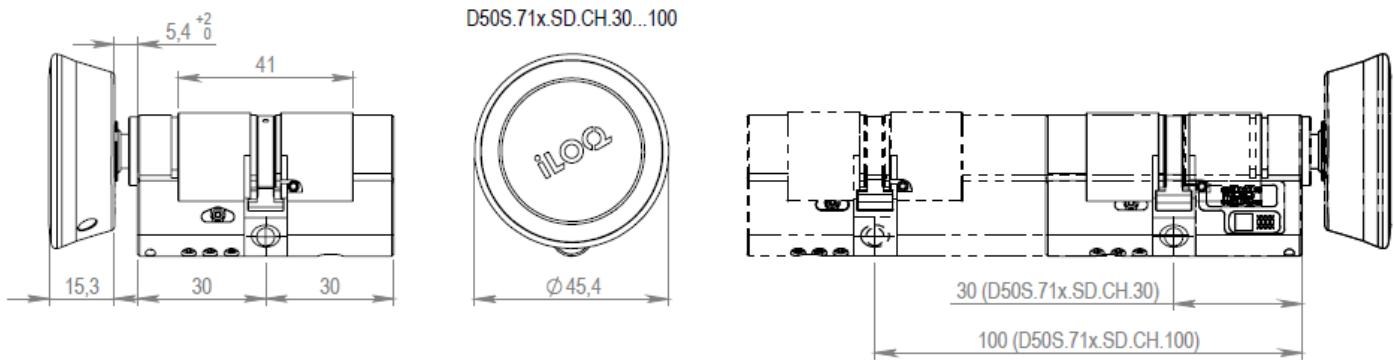

Memory capacity

| | |
|---------------------------------|-----|
| Number of access rights..... | 210 |
| Number of blocklisted keys..... | 500 |
| Number of time slots..... | 10 |

Technical data

| | |
|---------------------------------|--------------|
| Ingress protection rating | IP55 |
| Reader type..... | Short reader |
| Surface treatment..... | Satin chrome |

Certificates

| | |
|--|-----------|
| Attack resistance (EN 15684:2020)..... | Grade 0 |
| Category of use (EN 15684:2020)..... | Grade 1 |
| Credential related security (EN 15684:2020)..... | Grade D |
| Durability (EN 15684:2020)..... | Grade 6 |
| Environmental resistance (EN 15684:2020)..... | Grade 4 |
| Fire/smoke resistance (EN 15684:2020)..... | Grade B |
| Mechanical key related security (EN 15684:2020)..... | Grade 0 |
| System management (EN 15684:2020)..... | Grade 3 |
| Other certificates | FCC, ISED |