

Y50S.T.TL01 KIK Schlage Cylinder for B560/B660 Schlage Deadbolt

System-level description

The patented, award winning iLOQ S50 locking system offers advanced security and convenient access sharing capabilities for master-key locking environments.

The iLOQ Y50S KIK Schlage cylinders harvest electricity wirelessly from NFC field, which enables using phone not only as a key but also as a power source thus the lock is completely battery free. As no batteries are required, the locks are maintenance free and environmentally friendly green solution that eliminates work, costs, waste and harm associated with battery powered solutions.


The lock doesn't have a keyway due to the contactless NFC operation. It is designed to withstand harsh environments where the locks are exposed to dust, moisture and varying temperature conditions ranging from extremely cold to hot weather.

The phone as a key enables flexible access sharing with time restrictions and audit trail reporting over the air. The security level is kept high and security gaps caused by lost key can be eliminated completely without costly change of locks and keys.

Feature summary

- Comes with a 45 degree tailpiece for Schlage Deadbolt B560/B660
- NFC-powered: No batteries are required for the cylinder
- Opened with NFC enabled iPhone, Android phone and K55S Key Fob
- Secured using powerful AES256 encryption and mutual authentication
- Initial programming with PC and iLOQ P55S.1 Programming Token in connection to server
- Share and revoke access rights over the air
- Blocklist for lost key fobs
- Audit trail records with time stamp (can be configured on/off)
- Supports time restrictions
- Can be configured to require online opening authentication
- Can be re-programmed in the field with phone keys
- Firmware updateable
- The cylinder box includes: Knob Removal Tool and Cap Removal Tool
- High guard escutcheon is available for added security to use with B560/B660 Schlage deadbolt (Product Code: AX50.Y.ES1.26)

Dimensional drawing

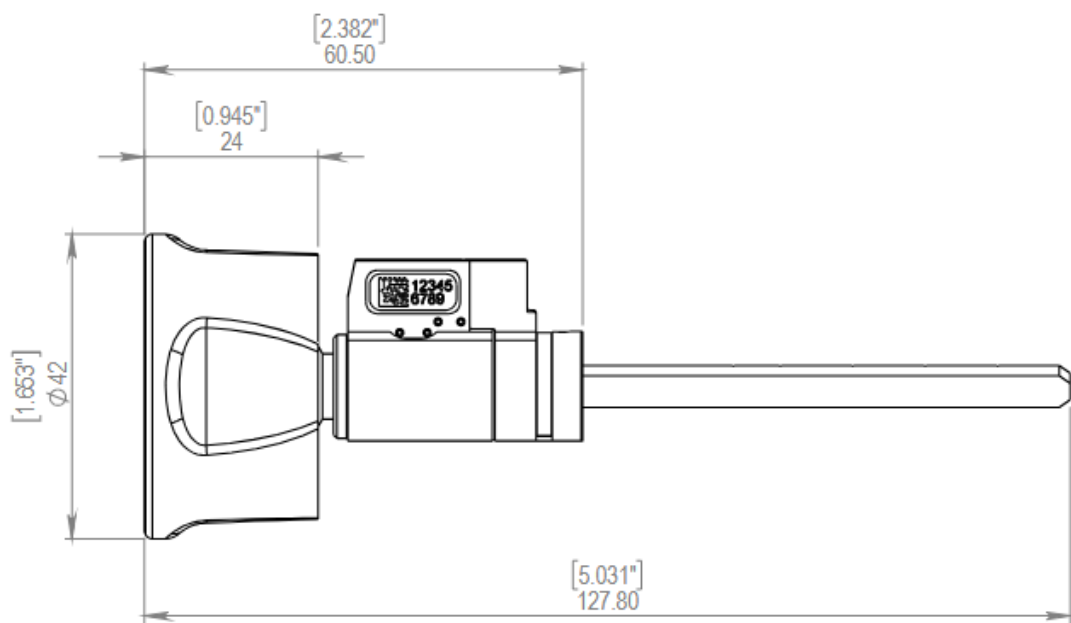

Memory capacity

Number of access rights.....	210
Number of blocklisted keys	500
Number of time slots	10
Size of event log	500

Technical data

Corrosion resistance	96h Salt Spray
Ingress protection rating.....	IP65
Maximum temperature.....	80°C (176°F)
Minimum temperature.....	-40°C (-40°F)
Usage environment.....	Outdoor

Certificates

EMC Compliant	FCC, ISED
UL Fire Rated	UL10C, CAN/ULC-S104, UL10B Up to 3 hrs
BHMA Certified	BHMA A156.5 (Grade 1), BHMA A156.30 (Level A)